




# PENGUIN III

## LOAD MANAGEMENT TIMER

Saves money, installs easily, and needs no upkeep or maintenance: the Penguin III is the newest load management timer in the Solid State Instruments product line. This is no ordinary timer; it's been designed specifically for utility load management programs and it works on low voltage control circuits. Plus, the unit's 10-year non-volatile memory retains system settings for 10 years in absence of power; and if power is lost, time-keeping continues for 10 years. Because the Penguin III works in conjunction with Penguin Programming software, utility companies have full control over the programming and customers cannot change the settings of this product.

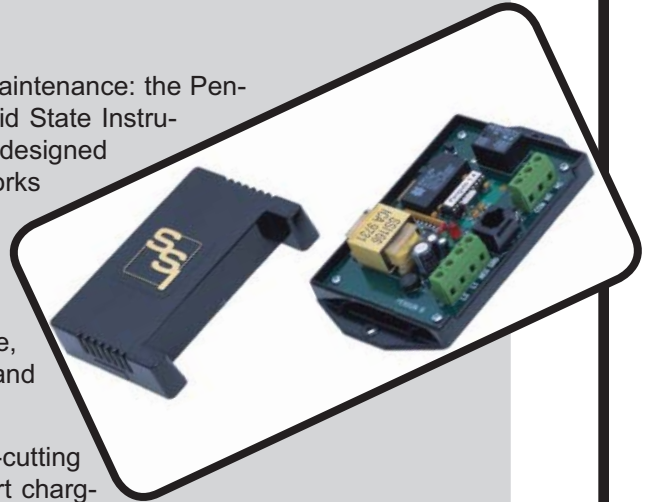

A load management timer is a great way to offer a cost-cutting alternative to your customers in applications like golf cart charging, forklift charging, water heater control, air conditioning cycling control and electric thermal storage heaters. By removing loads from on-peak time and restoring them during off-peak time, the Penguin III helps consumers make the most of TOU and utilities can build off-peak load.

The "Randomizer" feature of the Penguin III allows the controller to be programmed with a randomized or fixed time-delay cycle start time to avoid load lash-back among the controllers in service on your system. Fixed time delays are selectable from 0 minutes (no time delay) to 99 minutes. Four time settings are available daily to control loads during peak hours, and separate weekday/weekend control settings. Different schedules are also available for winter and summer settings. Single-screen Windows software works with the computer's RS-232C serial port and allows you to upload and download configurations to the timer by using just one button. The settings are easily confirmed at a glance and configurations can be saved to a disk and read from that disk. The simple interface and simple wiring make the Penguin III easy to program and easy to install.

### SOLID STATE INSTRUMENTS

a division of Brayden Automation Corp.

6230 Aviation Circle, Loveland, Colorado 80538

Phone: (970) 461-9600 Fax: (970) 461-9605 E-mail: [sales@solidstateinstruments.com](mailto:sales@solidstateinstruments.com)

# PENGUIN III SPECIFICATIONS

## ELECTRICAL

Power Input: 120/208-240 VAC

Device Circuitry Designation: Class 1

Power Consumption: 12 Watts

Relays: SPDT Low Power 3 Amp standard; or SPDT .5A Low Signal with gold contacts

Relay Contact Rating: 3 Amp @ 250VAC (Low Power)

.5 Amp@ 125VDC (Low Signal)

Contact Resistance: 50 milliohms

## MECHANICAL

Mounting: Any Position

Size: 5.70" H x 3.30" W x 1.50" D

Shipping Weight: 1 pound; Actual Weight 10 oz.

Enclosure Material: LEXAN (polycarbonate) housing meets UL 94V-1 flammability rating

## TEMPERATURE

Temperature Range: 0° C to +70° C; 0° F to +158° F

Humidity: 0 to 98% non-condensing



Solid State Instruments  
6230 Aviation Circle  
Loveland, CO 80538

(970) 461-9600 • (888) 272-9336  
FAX (970) 461-9605  
email: [info@solidstateinstruments.com](mailto:info@solidstateinstruments.com)  
[www.solidstateinstruments.com](http://www.solidstateinstruments.com)

Local Representative